

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
17 March 2005 (17.03.2005)

PCT

(10) International Publication Number
WO 2005/024297 A1

(51) International Patent Classification⁷: **F21V 21/04**

(21) International Application Number:
PCT/IT2004/000480

(22) International Filing Date:
7 September 2004 (07.09.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
FI2003A000235 10 September 2003 (10.09.2003) IT

(71) Applicant (for all designated States except US): **TARGETTI SANKEY S.P.A.** [IT/IT]; 164 Via Pratese, I-50145 Firenze (IT).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **TARGETTI, Giampaolo** [IT/IT]; 29, Via di Barbacane, I-50133 Firenze (IT).

(74) Agents: **BARDINI, Marco, Luigi** et al.: Società Italiana Brevetti S.p.A., Corso dei Tintori, 25, I-50122 Firenze (IT).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **RECESSED TYPE LIGHTING FIXTURE WITH DEVICE FOR QUICKLY MOUNTING AND DISMOUNTING THE LAMP**

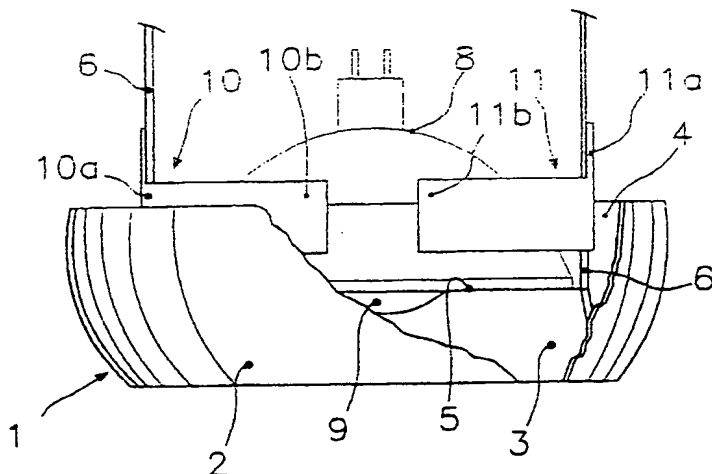

(57) Abstract: A recessed lighting fixture with a device for quickly mounting or dismounting the lamp comprising: an annular body (1) with a front edge (5) defining an aperture (7) with dimensions greater than the diameter of said lamp; flexible retaining means (10, 11) extending radially from the edge (5) at the aperture (7), suitable for holding the body of the lamp laterally; at least a pair of radial projections (9) extending internally from the edge (5) and defining a span with width smaller than the diameter of the lamp, so that the latter rests against the radial projections (9) and is forced against them by the flexible retaining means.

WO 2005/024297 A1